

TP9KACX, TP9KSCX & TP9KFX
9,000 lb. Clear Floor & Floor Plate
Two Post Asymmetric & Symmetric



888-288-6657
702 S. 3rd Ave.
Marshalltown, Iowa 50158
www.shoptoolsoutlet.com

Honest Service, Fair Prices, People You Can Trust

Introducing the New TP9K 'X' Series Two Post Lifts!! The new TP9KACX, TP9KSCX & TP9KFX Two Post, Clear Floor & Floor Plate Lifts have been redesigned to now include standard features with Single Piece Column construction, Internal Hose routing, Padded Overhead Shut-Off Bar with Kill Switch, Reduced overall Width, Drop-In Adjustable Swivel Pads with Height Adapters & Rubber Door Guards, making these models one of the best Two Post Lift values in the industry!



New Design & Features...
For the Best Two Post Lift
Value in the Industry!!

Standard Features:

- High Quality Construction
- Chain Drive
- Dual Point Lock Release
- Saddle Pad Adapters included (1 pair)
- Powder coat finish


New TP9K "X" Features:

- Single Piece Column construction (TP9KACX - TP9KSCX)
- Padded 'Shut Off' Bar w/ Kill Switch (TP9KACX - TP9KSCX)
- Low Profile 'drop-in' Swivel Pads w/ 1-1/2" adjustable height
- 4ea Stackable 1-3/8" & 4" 'drop in' Height Adapters
- Reduced overall Width w/ front-side Power Unit Mounting
- Internal Hose Routing w/ integrated Hose Guards
- Rubber Door Guards

TP9KACX, TP9KSCX & TP9KFX

9,000 lb. Clear Floor & Floor Plate

Two Post Asymmetric & Symmetric

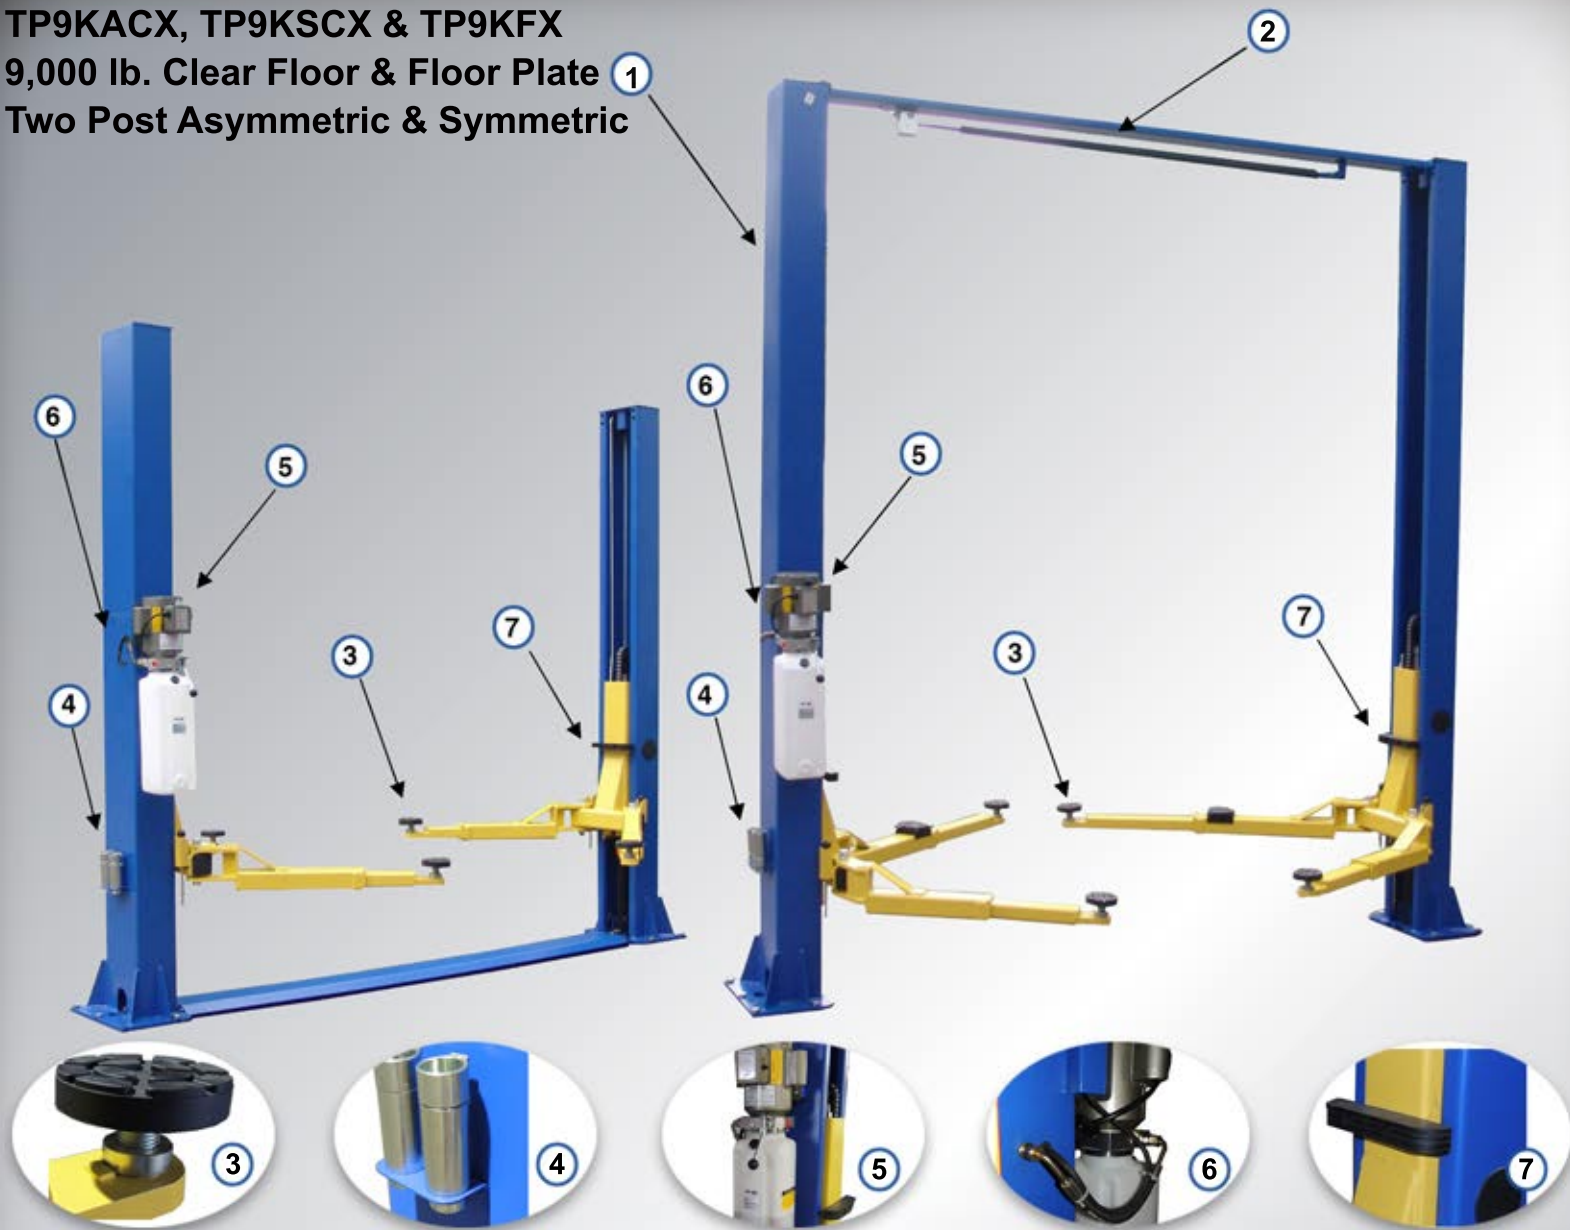

New!! TP9K "X" Series updated Design & Features

- 1 Single Piece Column construction
- 2 Padded 'Shut-Off' Bar w/ Kill Switch
- 3 Low Profile 'drop-in' Swivel Pads w/ 1-1/2" adjustable height
- 4 4ea Stackable 1-3/8" & 4" 'drop-in' Height Adapters
- 5 Reduced overall Width w/ front-side Power Unit mounting
- 6 Internal Hose Routing w/ integrated Hose Guards
- 7 Rubber Door Guards

Optional Accessory:

TP9KX-SPNCA

Spin Up Cradle Adapter, TP9KX (4 Ea)



Specifications	TP9KACX	TP9KSCX	TP9KFX
Lifting Capacity	9,000 lbs.	9,000 lbs.	9,000 lbs.
Height Overall	142.9"	142.9"	111.9"
Width Overall w/ Power Unit	138"	138"	134.6"
Max Lifting Height	72"	72"	72"
Width Between Columns	113.6"	113.6"	110.4"
Min Pad Height	4"	4"	4"
Drive Thru Clearance	96"	104"	101"
Lifting Speed	50S	50S	50S
Asymmetric / Symmetric	Asymmetric	Symmetric	Symmetric
Clear Floor / Floor Plate	Clear Floor	Clear Floor	Floor Plate
Front Arm Reach – Min / Max	29" – 41"	31" – 45"	31" – 45"
Rear Arm Reach – Min / Max	37" – 57"	31" – 45"	31" – 45"
Max Load Per Arm	2,250 lbs.	2,250 lbs.	2,250 lbs.
Cable Diameter	3/8"	3/8"	3/8"
Column Size	7.25" x 10.87"	7.25" x 10.87"	7.25" x 10.87"
Column Steel Thickness	5mm	5mm	5mm
Carriage Steel Thickness	5mm	5mm	5mm
Arm Steel Thickness	6mm	6mm	6mm
Power	220V-20 Amp, 1 PH	220V-20 Amp, 1 PH	220V-20 Amp, 1 PH
Ship Weight	1,370 lbs.	1,370 lbs.	1,265 lbs.