


- Welded hydraulic assembly to assure strength and eliminate leaks.
- Chromed ram and piston for added rust resistance.
- Built-in by-pass system prevents the ram from over-extended.
- Built-in safety valve protects against jack over-loading
- Meets 2014 ASME/PASE standards

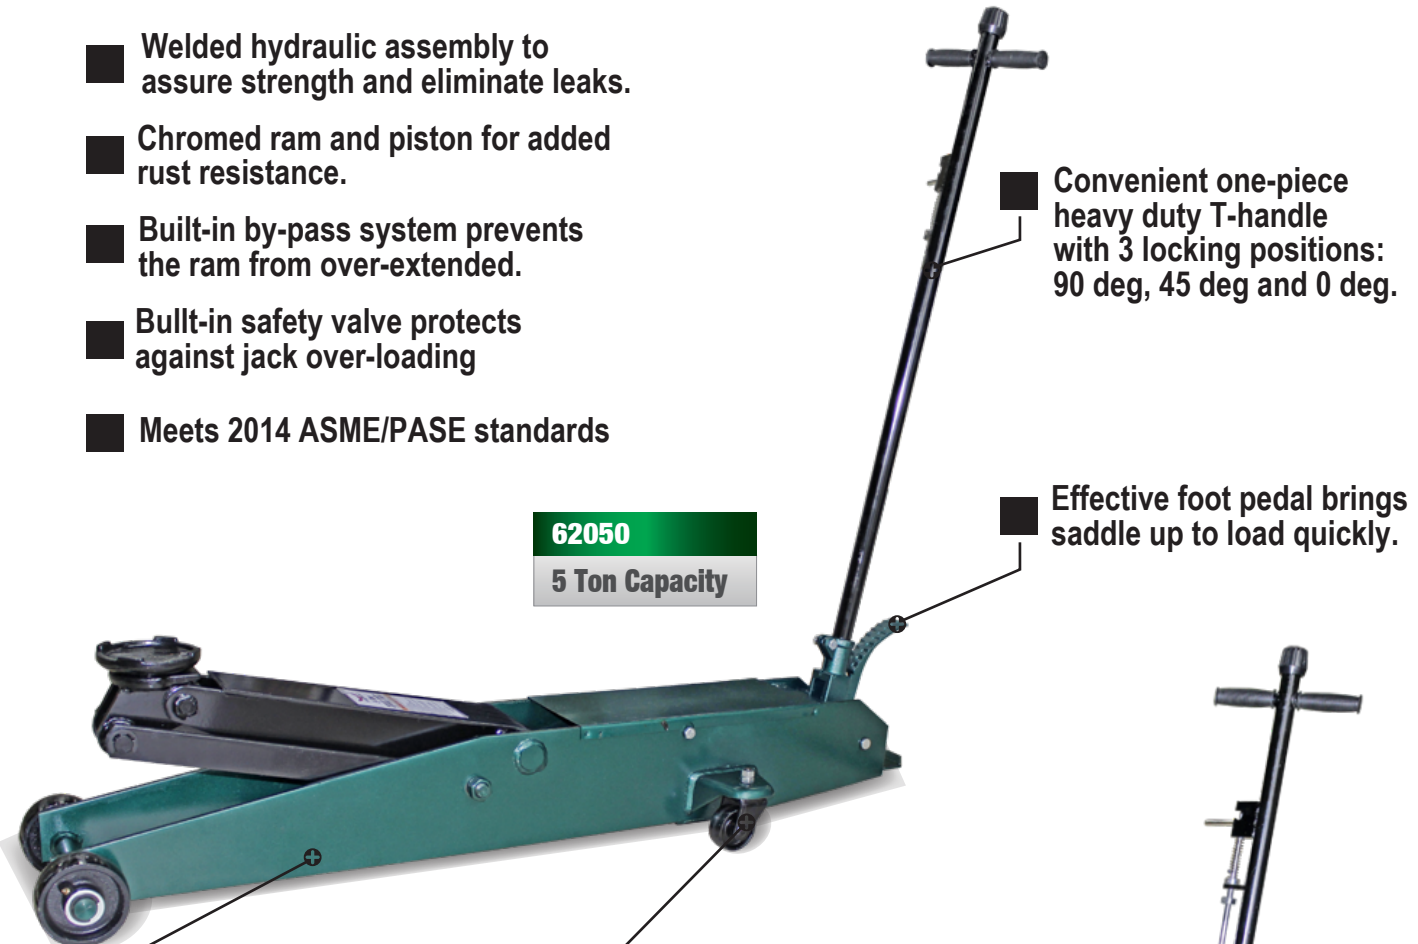

**62050**  
5 Ton Capacity

Convenient one-piece heavy duty T-handle with 3 locking positions: 90 deg, 45 deg and 0 deg.

Effective foot pedal brings saddle up to load quickly.

Heavy-duty steel construction provides stability and endurance

Swivel rear casters provide smooth maneuvering and positioning

Swivel saddle for easy positioning



**62100**  
10 Ton Capacity

Model	Capacity	Min. Height	Max Height	Handle Length	Overall Length	Overall Width	G.W.
62050	5 Ton	5-15/16"	27 "	45-1/2"	59-1/4"	14-3/8"	230 Lbs.
62100	10 Ton	6-1/4"	27"	45-1/2"	64-7/16"	19-1/4"	350 Lbs.