

# RAJ-8K Rolling Air Jack



The RAJ-8K is a high quality, low profile, air bag, scissor type rolling bridge jack with pneumatic operation that includes exclusive telescoping Universal Roller Body Bracket Assemblies designed for either High Mount or Low Mount applications. The RAJ-8K Jacks also come standard with stackable Pad & Height Adaptors, dual Air Bags, adjustable Pressure Regulator & Locking Height Position.



## RAJ-8K-L & RAJ-8K-H Dimensions



### RAJ-8K-L ‘Low Mount’ - Bracket Configurations

Low Mount’ model incorporates adjustable height Roller Body Brackets suitable for Four Post Lifts using low profile jacks with medium to high mount jack rails, to provide enough clearances for proper operation when lift is fully lowered. Two adjustable mounting heights positions available.

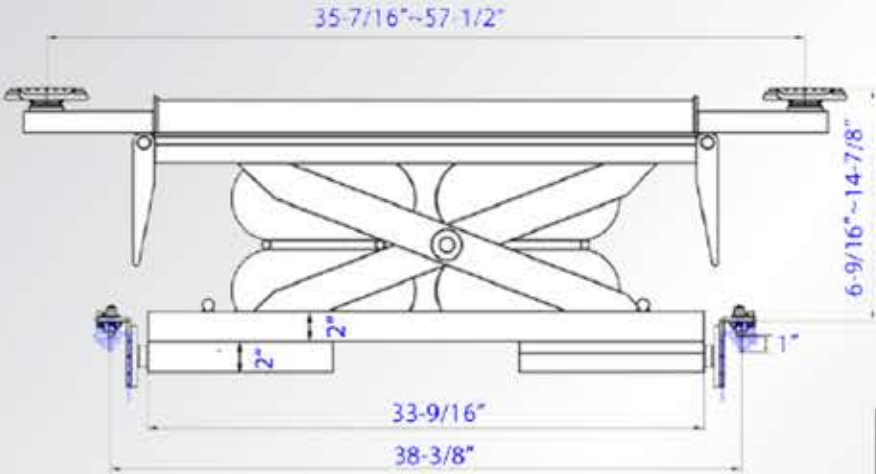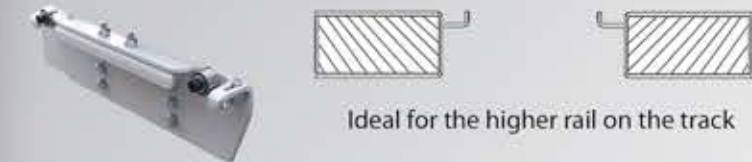

### RAJ-8K-H ‘High Mount’ - Bracket Configurations

‘High Mount’ model incorporates adjustable height Roller Body Brackets suitable for Four Post lifts using low profile jacks with low mount jack rails and high profile runways, to provide enough clearances for proper operation ad from touching the ground when fully lowered.Two adjustable mounting heights positions available.

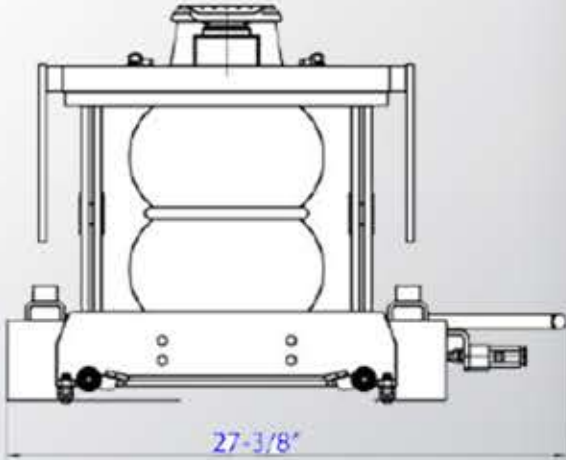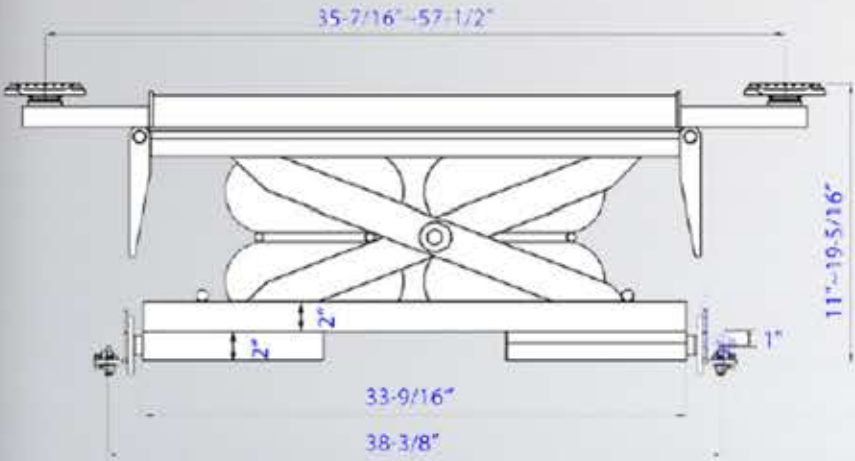

Recommended RAJ-8K model & Lift Combo		
Lift Model	RAJ-8K-H	RAJ-8K-L
SL-12K-A	O	
FP12K-K		O
FP14K		X
FP14KA	X	
FP14K-C		X
FP14KA-C	X	
FP14KO-A	X	
X = Recommended / O = Acceptable		



888-288-6657  
702 S. 3rd Ave.  
Marshalltown, Iowa 50158  
[www.shoptoolsoutlet.com](http://www.shoptoolsoutlet.com)

Honest Service, Fair Prices, People You Can Trust

## Features

- Universal Roller Body design with dual ‘spring loaded’ precision Roller Bearing & Side Guide Wheels w/adjustable Height for Low, Medium & High Jack Rail configurations
- Low Profile configuration
- Rolls on top edge of Jack Rail for smooth maneuverability
- Dual Height Telescoping Support Arms
- Pneumatic operation w/ adjustable Pressure Regulator
- Dual Air Bags
- Stackable Pad & Height Adaptors
- 1-5/16” & 5” Height Adaptors (1 Pair each)
- Ships in durable Wooden Crate

## Specifications

• Capacity	8,000 lbs.
• Telescoping Support Arms - Min/Max:	38-3/8” – 60” (Roller Body wheel center)
• Lifting Arms - Min/Max:	35-7/16” – 57-1/2” (Pad center)
• Lifting Height - Min/Max:	6-9/16” – 14-7/8” (Pad Adaptor only)
• ‘High Mount’ - adj. Roller Body Bracket Height	1”
• ‘Low Mount’ - adj. Roller Body Bracket Height	1”
• Stackable Adaptor Heights	1-5/16” & 5” (1 Pair)
• Locking Positions	1ea
• Required Power	100 - 125 PSI / 10 - 20 CFM
• Shipping Weight	426 lbs.
• Package Size	43”L x 29” W x 12” H