

TWO-POST SUPER ASYMMETRIC LIFT

The new OH-10 is an industrial-level two post lift by ALI certified, representing AMGO's professional expertise in development and manufacture. The robust design features two height setting as standard, and two width setting as optional. It incorporates professional technologies such as Super Asymmetric patent technology and single-point lock release technology, ensuring safety priority, durable longevity and convenient operations.



OH-10

Main Features

- ✓ 10,000lbs capacity.
- ✓ Dual hydraulic direct-driven cylinders made on high standard.
- ✓ **SuperAsymmetric** to load different vehicles in an asymmetric or symmetric configuration.
- ✓ Aero cable used for synchronization.
- ✓ Single-point manual safety release mechanism, disengages both columns simultaneously from one side.
- ✓ Self-lubricating UHMW Polyethylene sliders.
- ✓ Clear-floor design, provide unobstructed floor use.
- ✓ Overhead safety shut-off device prevents vehicle damage.
- ✓ Stackable rubber pads and 1.5", 2.5", 5" adapters as standard supply.
- ✓ Standard two height settings accommodate varying ceiling heights.
- ✓ Toe guards and tool trays come as standard.



Single point safety release makes it easier for operators to unlock both columns from one column.




Hydraulic Direct-driven Cylinders.



The optional saddle adapter. Kits No. for light truck:20802.



The stackable rubber pads assembly with 1.5", 2.5", 5" extension adapters.




Automatic arm restraints



SuperAsymmetric arms allow to load different vehicles in an asymmetric or symmetric configuration.

SPECIFICATIONS

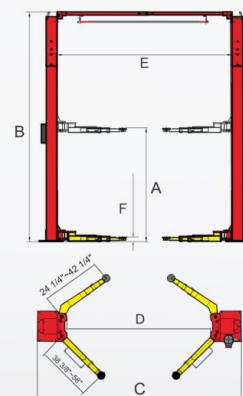

Model	OH-10
Lifting Capacity	10,000 lbs
Lifting Time	56s
Max. Lifting height: (w/o extension adapter)	71 1/2"
Max. Lifting height: (w/ extension adapter)	80 18/32"
Max. lock height: (w/o extension adapter)	69 1/2"
Max. lock height: (w/ extension adapter)	78 1/2"
Overall Height:(low setting)	142 1/2"
Overall Height:(high setting)	150 1/2"
Overall Width	135"
Drive-Thru Clearance	99 1/2"
Width Between Columns	112 1/4"
Minimum Pad Height	3 1/2"
Gross Weight	1,642 lbs
Motor	2.0HP, 220V 60Hz, single phase

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211,USA
Tel:(214)377-7742