


SPECIFICATIONS

Model		PRO-12SX	PRO-12ASX
Lifting Capacity		12,000lbs	12,000lbs
Lifting Time		45S	45S
Overall Length(Inc Ramps)	A	232 11/16"	232 11/16"
Overall Length(No Inc. Ramps)	B	196 25/32"	196 3/4"
Overall Width	C	132 1/8"	132 1/8"
Width Between Columns	D	118 1/8"	118 1/8"
Max. Lifting Height	E	74"	76"
Max. Lock Height to top of runway		70 7/8"	72 7/8"
Overall Height	F	86"	86"
Minimum Height	G	6 5/8"	8 5/8"
Max. Underneath Height	H	68 1/2"	68 1/2"
Max. Lock Underneath runway		65 3/8"	65 3/8"
Drive-Thru Clearance	I	104 3/16"	104 1/8"
Width Between Runways	J	43 5/16" Min.3 3/8"~ Max.53 3/4"	43 5/16" Min.3 3/8"~ Max.53 3/4"
Outside Edge of Runways	K	83 5/16" Min.43 3/8"~ Max.93 3/4"	83 5/16" Min.43 3/8"~ Max.93 3/4"
Min. Four Wheel Align	L	/	81 7/8"
Max. Four Wheel Align	M	/	151 9/16"
Max. Two Wheel Align	N	/	157 1/2"
Gross Weight		2,251 lbs	2,804 lbs
Motor		2.0HP,220V/60Hz,single phase	

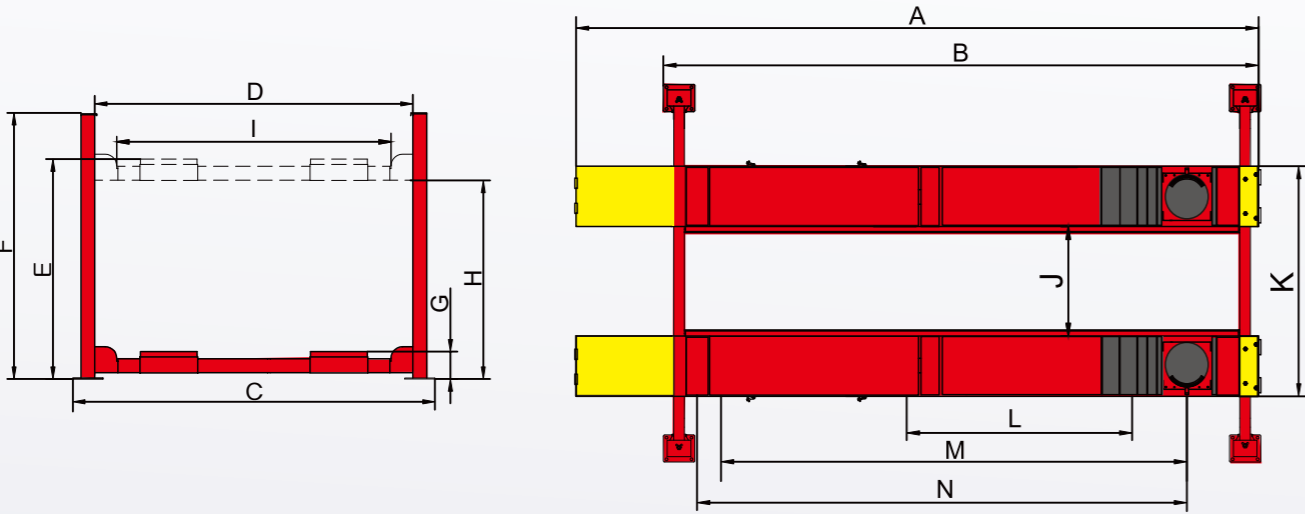

AMGO HYDRAULIC CORPORATION
SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211,USA
Tel:(214)377-7742

AMGO® Hydraulics
We're More Than a Manufacturer. We Are the
Leader in Innovation,Technology and Service
www.amgohyd.com

AMGO® Hydraulics
The Manufacturing Powerhouse

FOUR POST
COMMERCIAL LIFT

AMGO commercial grade PRO-12SX and PRO-12ASX are the perfect lifts for your everyday vehicles service with a capacity up to 12,000lbs. They are extremely wider to more than 132" and with many advanced features as other AMGO four post lifts, include adjustable skid-proof diamond platforms and double safety locks. Either general service or alignment service, they will satisfy you everyday.



Optional Rolling Jack
RJ-6H: manual hydraulic type 6,000lbs
RJ-6A: pneumatic hydraulic type 6,000lbs

PRO-12SX

PRO-12ASX


PRO-12SX
General service

PRO-12ASX
Alignment service


- ✓ 12,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards using high quality seals;
- ✓ Adjustable lifting platform: Off-side platform can adjust the mounting position left or right as required. The standard distance between two platforms is 43 1/4" and maximum distance is 53 3/4";
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed.
- ✓ Optional Rolling Jacks:
 - RJ-6H 6,000lbs manual control;
 - RJ-6A 6,000lbs pneumatic pump;
- ✓ More choices:
 - Optional led lights Kits No. 40103;
 - Optional extension Kits No. 40903;
 - Optional air line Kits No. 40102.




FEATURES

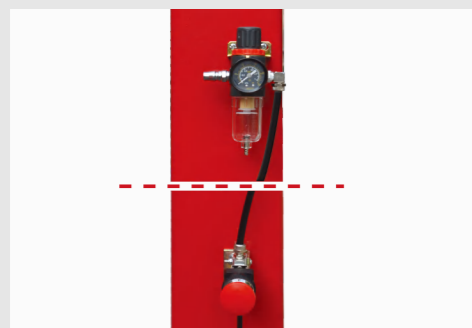

- Air controlled safety device.

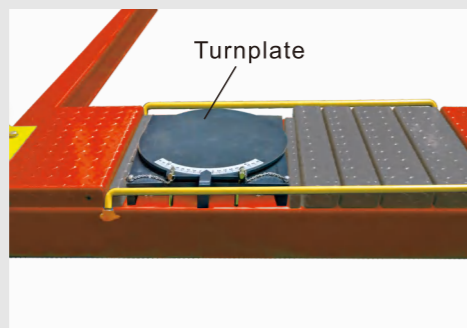

- **Optional** turnplate for PRO-12ASX, Kits No. 40101.

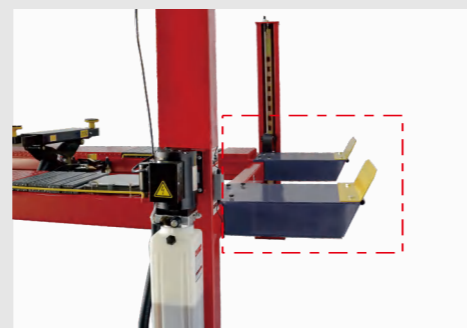

- **Optional** length extension kits adds an extra 26" length to the platform. Kits No.: 41203



- **Optional** adjustable blocks for PRO-12ASX Kits No.: 40905 (used with kits 40903)



- **Optional** airline kits. Easy and convenient to install with all models of rolling jack with pneumatic pump. Kits No. 40102A



- **Optional** Rolling jack 6,000lbs: RJ-6A with pneumatic hydraulic pump; RJ-6H with manual pump.